


### PHYSICAL SPECIFICATION


Nominal Voltage Nominal Capacity(20HR)		6V 1.3AH
Dimension	Length	97±1mm (3.82 inches)
	Width	24±1mm (0.94 inches)
	Container Height	51±2mm (2.01 inches)
	Total Height	57±2mm (2.24 inches)
Weight		Approx 0.30Kg (0.66 lbs)
Standard Terminal		F3-Fasten Tab No.170



Dimensions (mm)

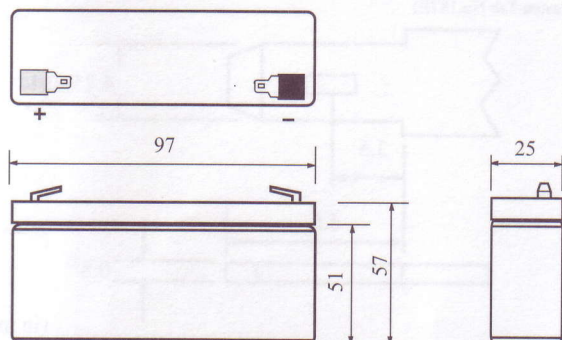


Standard Terminal  
F3 (Fasten Tab NO.170)

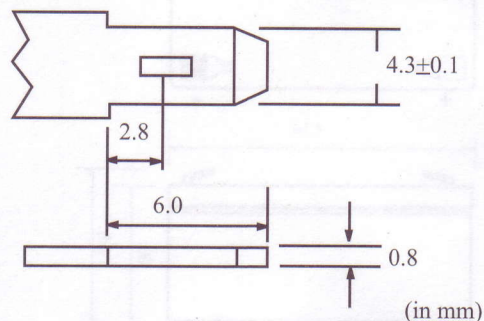

### ELECTRICAL SPECIFICATION

Capacity	20 hour rate(0.065A)	1.3Ah	It is recommended to use constant-voltage charge and recharge immediately after use
	10 hour rate(0.13A)	1.24Ah	
	5 hour rate(0.21A)	1.1Ah	
	1 hour rate(0.78A)	0.78Ah	
Capacity affected by temperature	40°C (104°F)	105%	Constant-Voltage Charge
	20°C (68°F)	100%	
	0°C (32°F)	85%	
Internal Resistance		Fully charged battery(20°C, 68°F)50mΩ	
			Cycle
			Initial Charging Current less than 0.39A
			Voltage 7.20-7.50V at 20°C (68°F)
			Temperature Coefficient -15mV/°C
			Standby
			Voltage 6.75-6.90V at 20°C (68°F)
			Temperature Coefficient -10mV/°C

Discharge Characteristics fully charged (20°C, 68°F)

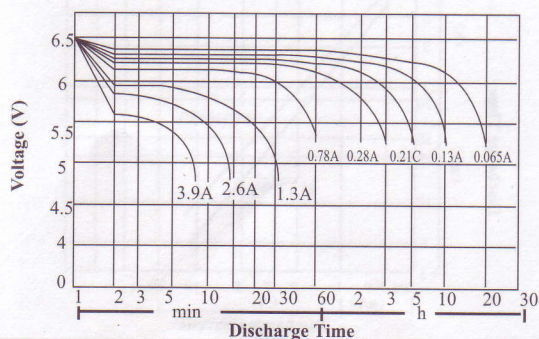

Discharge Characteristics (0°C/32°F, 40°C/104°F)

