


PHYSICAL SPECIFICATION


Nominal Voltage Nominal Capacity(20HR)		6V 12AH
Dimension	Length	151±1mm (5.94 inches)
	Width	51±1mm (2.0 inches)
	Container Height	94±2mm (3.70 inches)
	Total Height	100±2mm (3.94 inches)
Weight		Approx 1.94Kg (4.27 lbs)
Standard Terminal		F1-Fasten Tab No.187E




Dimensions (mm)

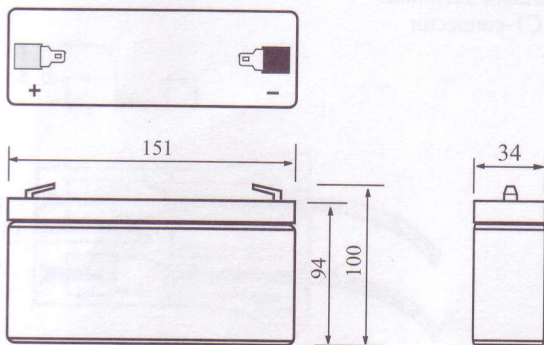

Standard Terminal
F1(Fasten Tab No.187E)

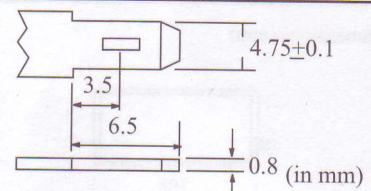


Optional Terminal
F2(Fasten Tab No.250A)

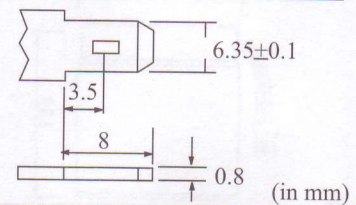

ELECTRICAL SPECIFICATION

Capacity	20 hour rate(0.60A)	12.0Ah	It is recommended to use constant-voltage charge and recharge immediately after use	
	10 hour rate(1.2A)	11.4Ah		
	5 hour rate(1.92A)	10.2Ah		
	1 hour rate(7.2A)	7.2Ah		
Capacity affected by temperature	40°C (104°F)	105%	Constant-Voltage Charge	Cycle
	20°C (68°F)	100%		
	0°C (32°F)	85%		Standby
Internal Resistance		Fully charged battery(20°C, 68°F)10mΩ	Initial Charging Current less than 3.6A Voltage 7.20-7.50V at 20°C (68°F) Temperature Coefficient -15mV/°C Voltage 6.75-6.90V at 20°C (68°F) Temperature Coefficient -10mV/°C	

Discharge Characteristics fully charged (20°C, 68°F)

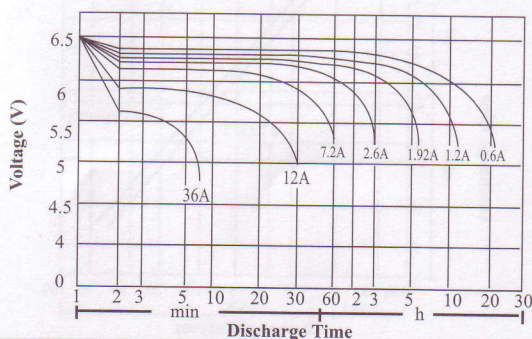

Discharge Characteristics (0°C/32°F, 40°C/104°F)

