


PHYSICAL SPECIFICATION


Nominal Voltage Nominal Capacity(20HR)		6V 3.4AH
Dimension	Length	134±1mm (5.28 inches)
	Width	34±1mm (1.34 inches)
	Container Height	60±2mm (2.36 inches)
	Total Height	66±2mm (2.60 inches)
Weight		Approx 0.68Kg (1.49 lbs)
Standard Terminal		F1-Fasten Tab No.187E



Dimensions (mm)

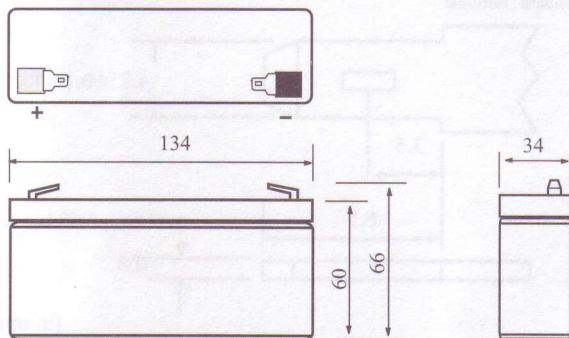


Standard Terminal
F1 (Fasten Tab No.187E)

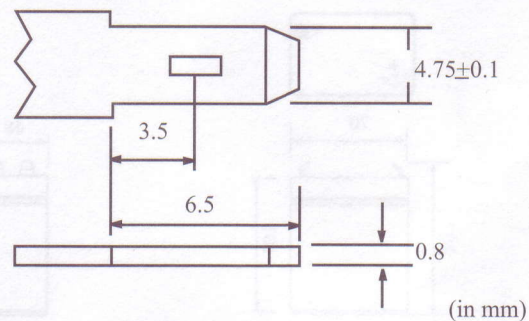

ELECTRICAL SPECIFICATION

Capacity	20 hour rate(0.17A)	3.4Ah	It is recommended to use constant-voltage charge and recharge immediately after use	
	10 hour rate(0.34A)	3.23Ah		
	5 hour rate(0.54A)	2.89Ah	Constant-Voltage Charge	Cycle
	1 hour rate(2.04A)	2.04Ah		Standby
Capacity affected by temperature	40°C (104°F)	105%	Initial Charging Current less than 0.99A	
	20°C (68°F)	100%	Voltage 7.20-7.50V at 20°C (68°F)	
	0°C (32°F)	85%	Temperature Coefficient-15mV/°C	
Internal Resistance	Fully charged battery(20°C, 68°F)25mΩ		Constant-Voltage Charge	Cycle
				Standby
			Voltage 6.75-6.90V at 20°C (68°F)	
			Temperature Coefficient-10mV/°C	

Discharge Characteristics fully charged (20°C, 68°F)

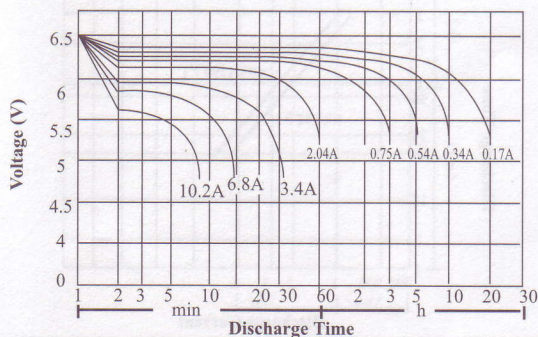

Discharge Characteristics (0°C/32°F, 40°C/104°F)

