



PHYSICAL SPECIFICATION

Nominal Voltage		12V
Nominal Capacity(20HR)		26AH
Dimension	Length	166±2mm (6.54 inches)
	Width	176±2mm (6.93 inches)
	Container Height	128±2mm (5.04 inches)
	Ttal Height	128±2mm (5.04 inches)
Weight		Approx 8.7Kg (19.2 lbs)
Standard Terminal		B3(Bolt & nuts Terminal) Bolt Type: M5

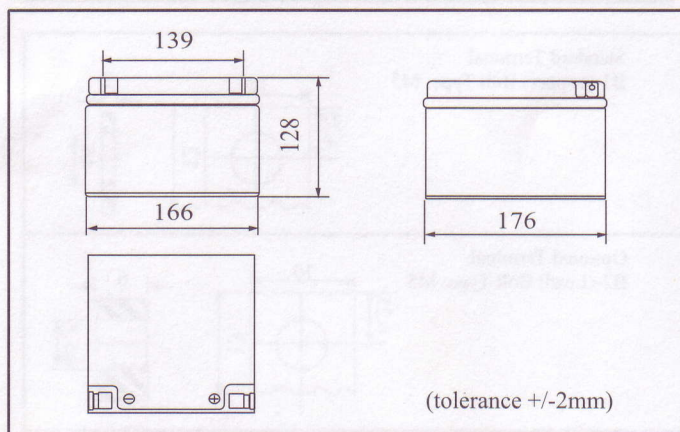


B3 (Bolt-and-nut lead terminal)
Bolt Type: M5

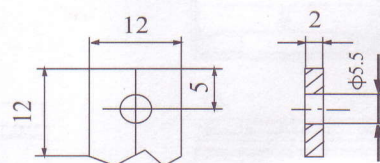

ELECTRICAL SPECIFICATION

Capacity	20 hour rate(1.3A)	26Ah	It is recommended to use constant-voltage charge and recharge immediately after use		
	10 hour rate(2.5A)	25Ah			
	5 hour rate(4.3A)	21.5Ah	Constant-Voltage Charge	Cycle	Initial Charging Current less than 6.5A Voltage 14.1V-14.4V at 25℃ (77℉) Temperature Coefficient -18mV/℃
	3 hour rate(6.3A)	18.9Ah			
	1hour rate(15A)	15Ah		Standby	No limit on Initial Charging Current Voltage 13.5V-13.8V at 25℃ (77℉) Temperature Coefficient -18mV/℃
Capacity affected by temperature	40℃ (104℉)	102%			
	25℃ (77℉)	100%			
	0℃ (32℉)	85%			
Internal Resistance	Fully charged battery(25℃, 77℉)10mΩ				

Discharge Characteristics(25°C, 77°F)

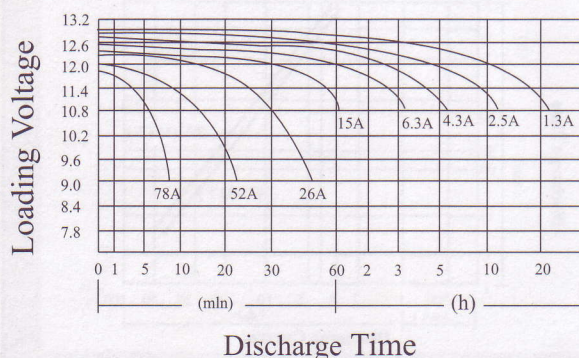

Discharge Current & Discharge Duration Time

